

技术参数:

— 插针数: 9

— 额定电流

电力针: 1*15A

信号针: 8*7A

— 额定电压: 25V~/60V-

— 额定脉冲电压: 1.5KV

— 污染等级: 3

— 绝缘电阻: $\geq 10^{12}\Omega$

— 温度范围: $-40^{\circ}\text{C} \dots +115^{\circ}\text{C}$

— 阻燃等级: V0 (UL94)

— 接触电阻: $\leq 5\text{m}\Omega$

— 插拔次数: ≥ 100

— 插体材料: PBT

— 插针材料: 铜合金

— 电镀材料: 金

— 接线方式: 螺栓连接

— 导线截面规格:

电力针: $0.14-1.0\text{mm}^2$ (26-16AWG)

信号针: $0.14-0.75\text{mm}^2$ (26-18AWG)

Technical specification:

— Number of contacts: 9

— Rated current

power contact: 1*15A

signal contact: 8*7A

— Rated voltage: 25V~/60V-

— Rated impulse voltage: 1.5KV

— Pollution degree: 3

— Insulation resistance: $\geq 10^{12}\Omega$

— Temperature range: $-40^{\circ}\text{C} \dots +115^{\circ}\text{C}$

— Flammability acc.to UL94: V0 (UL94)

— Contact resistance: $\leq 5\text{m}\Omega$

— Mating cycles: ≥ 100

— Material of insert: PBT

— Material of contact: copper alloy





— Contact plating: Au

— Terminal: Screw terminal

— Wire gauge:

power contact: $0.14-1.0\text{mm}^2$ (26-16AWG)

signal contact: $0.14-0.75\text{mm}^2$ (26-18AWG)

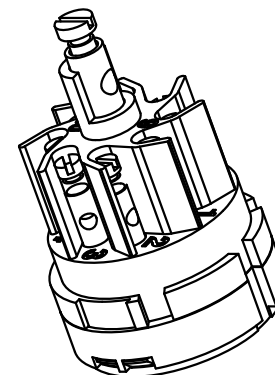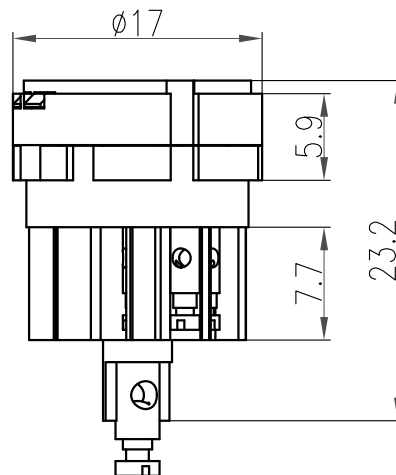

触点排列: 配合面

Contact arrangement: mating side

						表面处理 Finish	—				图号 Drawing No.	—	
						材料 Material	—				产品代号 Part Code	HR23-009-F	
											产品料号 Part No.	1810090210001	
标记 Mark	处数 Number	变更描述/Description			签名 Signature		日期 Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	—
	姓名/Name	日期/Date		姓名/Name	日期/Date								
绘图 Drawn	TC CHEN	04.05.2016	标准化 Stand.	—	—	2:1	V1.0	6.3g	—	 厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.,LTD			
审核 Checked	ZM LIN	04.05.2016											
工艺 Process	—	—	批准 Approved	YY LUO	04.05.2016	 	All Dimensions in mm Original Size DIN A 4						